



CLICK POINT 4


LINEAR SYSTEMS




	W	mA	TEMP	LUM	CRI
X4	12	700	2.700K	1.440	>90
			3.000K	1.640	
			4.000K	1.700	

TEC.DRAWINGS

Central Position



Side Position

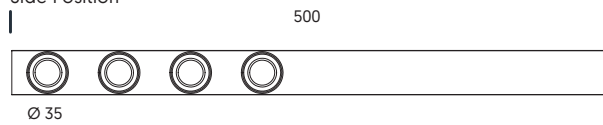

LED ⏚ 230V IP20 50.000h L90/B10 McAdam C3
 500mm ≈ 13w > 1.400lm **KPNT A 04**

BASIC OPTIONS

NO DIM	N	No Dimmable								
3K	3	3000K								
40°	4	40°								
C	C	Central Position								
WS	WS	Satin White	KPNT	A	04	N	3	4	C	WS
BS	BS	Satin Black	KPNT	A	04	N	3	4	C	BS

CUSTOMIZE OPTIONS

LED CONTROL										
DALI	D	Dimmable Dali	KPNT	A	.	D	.	4	.	..
K	K	Casambi	KPNT	A	.	K	.	4	.	..
D	D	Bluetooth	KPNT	A	.	D	.	4	.	..
LED COLOR TEMPERATURE										
2.7K	2	2700K	KPNT	A	.	.	2	4	.	..
4K	4	4000K	KPNT	A	.	.	4	4	.	..
LED POSITION										
S	S	Side Position	KPNT	A	.	.	.	4	S	..