


FOCUS 55 SURFACE PROJECTORS





| | W | mA | TEMP | LUM | CRI |
|----------|------|-----|--------|-------|-----|
| FOCUS 55 | 12.2 | 350 | 2.700K | 1.165 | >95 |
| | | | 3.000K | 1.245 | |
| | | | 4.000K | 1.380 | |

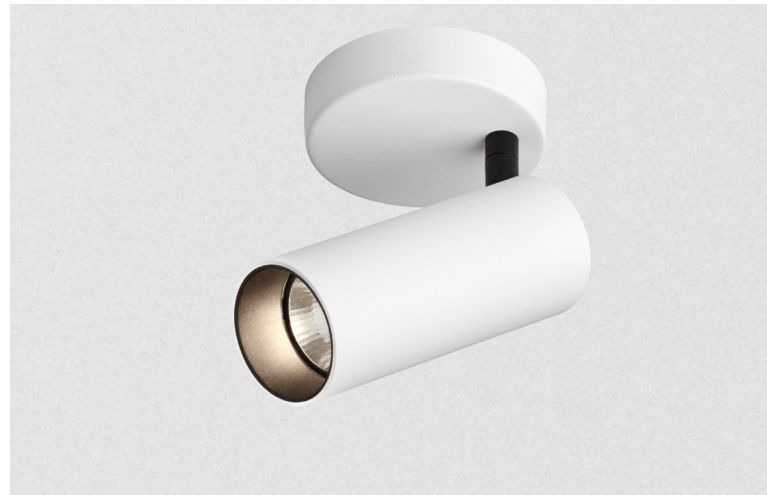

CEILING ≈ 12W > 1.300lm **FCC5 A 55**


TEC.DRAWINGS

*FOCUS CEILING

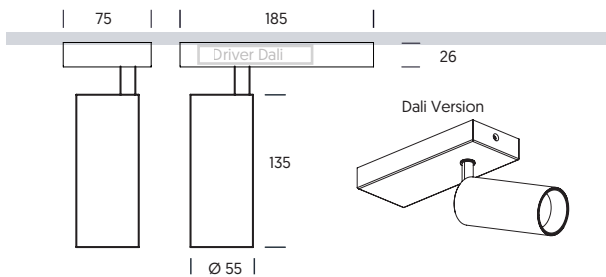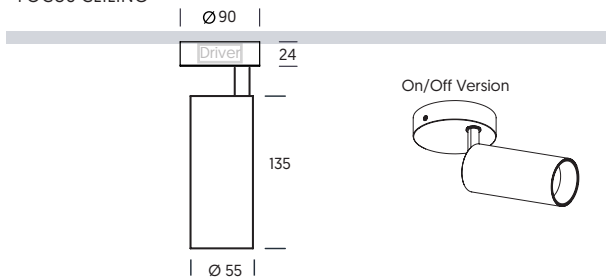

* Disponible pronto, solo en version No-dimmable. / Available Soon, Only for No dimmable version.

COMPLEMENTS

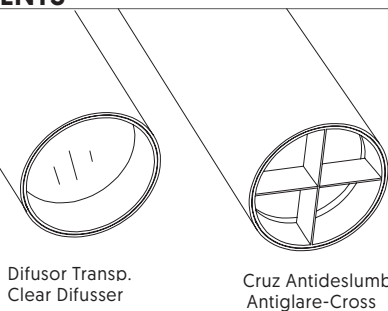

BASIC OPTIONS

| | | | | | | | | | | |
|---------------|-----------|----------------|------|---|-----------|----------|----------|----------|----------|-----------|
| NO DIM | N | No Dimmable | | | | | | | | |
| 3K | 3 | 3000K | | | | | | | | |
| 2 | 2 | 25° | | | | | | | | |
| B | B | Clear Difusser | | | | | | | | |
| WS | WS | Satin White | FCC5 | A | 55 | N | 3 | 2 | B | WS |
| | | | FCC5 | A | 55 | N | 3 | 2 | B | WS |
| BS | BS | Satin Black | FCC5 | A | 55 | N | 3 | 2 | B | BS |
| | | | FCC5 | A | 55 | N | 3 | 2 | B | BS |

CUSTOMIZE OPTIONS

| | | | | | | | | | | |
|------------------------------|-----------|------------------|------|---|-----------|----------|----------|----------|----------|-----------|
| LED CONTROL | | | | | | | | | | |
| DALI | D | Dimmable Dali | FCC5 | A | 55 | D | . | . | . | . |
| LED COLOR TEMPERATURE | | | | | | | | | | |
| 2.7K | 2 | 2700K | FCC5 | A | 55 | . | 2 | . | . | . |
| 4K | 4 | 4000K | FCC5 | A | 55 | . | 4 | . | . | . |
| LED BEAM ANGLE | | | | | | | | | | |
| 1 | 1 | 16° | FCC5 | A | 55 | . | . | 1 | . | . |
| 4 | 4 | 40° | FCC5 | A | 55 | . | . | 4 | . | . |
| LED COMPLEMENTS | | | | | | | | | | |
| P | P | Cross | FCC5 | A | 55 | . | . | . | P | . |
| COLOURS | | | | | | | | | | |
| PB | PB | Polished & Black | FCC5 | A | 55 | . | . | . | . | PB |
| CB | CB | Copper & Black | FCC5 | A | 55 | . | . | . | . | CB |