

# CLICK BALO


## LINEAR SYSTEMS




	W	mA	TEMP	LUM	CRI
BALO PENDANT	8.2	500	2.700K	2x505	>80
			3.000K	2x536	
BALO UP			2.700K	2x505	
			3.000K	2x536	

## TEC.DRAWINGS

BALO PENDANT

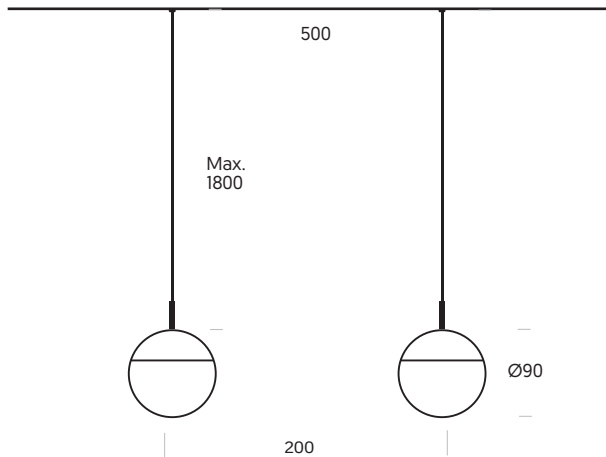

BALO UP

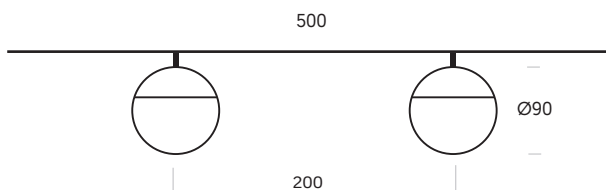

LED 230V IP20

Balo PENDANT ≈ 8W >2x500lm **KBLP A 04 . . 9 A ..**  
 Balo UP ≈ 8W >2x500lm **KBLU A 04 . . 9 A ..**

## BASIC OPTIONS

NO DIM	<b>N</b>	No Dimmable							
3K	<b>3</b>	3000K							
9	<b>9</b>	120°							
A	<b>A</b>	Ice Difusser							
WB	<b>WB</b>	White Black	KBL	A	04	<b>N</b>	<b>3</b>	<b>9</b>	<b>A</b> <b>WB</b>
BS	<b>BS</b>	Satin Black	KBL	A	04	<b>N</b>	<b>3</b>	<b>9</b>	<b>A</b> <b>BS</b>


## CUSTOMIZE OPTIONS

### LED CONTROL

DALI	<b>D</b>	Dimmable Dali	KBL	A	04	<b>D</b>	.	<b>9</b>	<b>A</b> <b>..</b>
K	<b>K</b>	Casambi	KBL	A	04	<b>K</b>	.	<b>9</b>	<b>A</b> <b>..</b>
Bluetooth	<b>D</b>	Bluetooth	KBL	A	04	<b>D</b>	.	<b>9</b>	<b>A</b> <b>..</b>

### LED COLOR TEMPERATURE

2.7K	<b>2</b>	2700K	KBL	A	04	.	<b>2</b>	<b>9</b>	<b>A</b> <b>..</b>
------	----------	-------	-----	---	----	---	----------	----------	--------------------



Para versión Bluetooth añadir Kit B.  
 For Version Bluetooth please add the Kit B.