


CLICK DOT

LINEAR SYSTEMS




	W	mA	TEMP	LUM	CRI
DOT 5	10	700	2.700K	1.000	>90
			3.000K	1.079	
			4.000K	1.155	
DOT 10	20	700	2.700K	2.058	>90
			3.000K	2.158	
			4.000K	2.310	

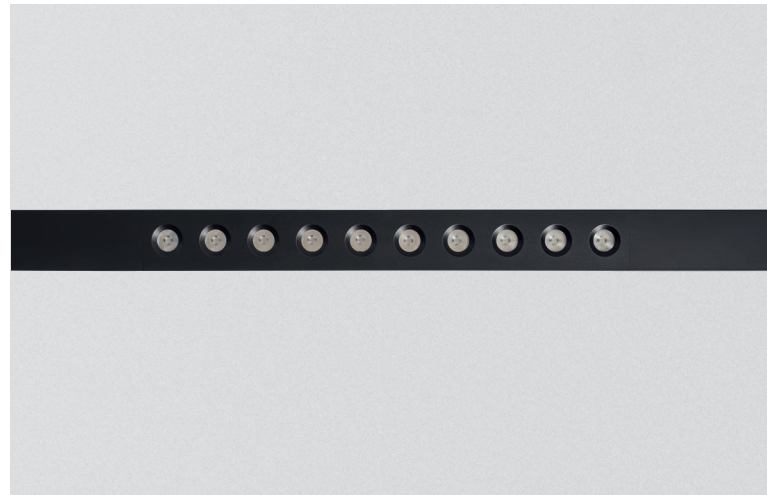


TEC.DRAWINGS

DOT 5

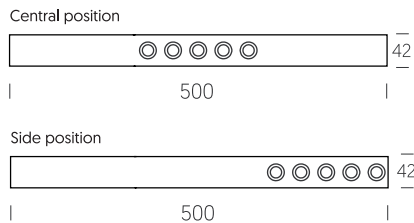

DOT 10

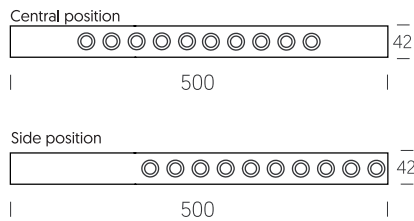

LED 230V IP20


5P ≈ 10W > 1.000lm **KDT5 A 05**
 10P ≈ 20W > 2.000lm **KDT1 A 10**

BASIC OPTIONS

	N	No Dimmable							
	3	3000K							
	3	30°							
	C	Central position							
	WS	Satin White	KDT · A	05	N	3	3	C	WS
			KDT · A	10	N	3	3	C	WS
	BS	Satin Black	KDT · A	05	N	3	3	C	BS
			KDT · A	10	N	3	3	C	BS

CUSTOMIZE OPTIONS

LED CONTROL									
	D	Dimmable Dali	KDT · A	.	D
	K	Casambi	KDT · A	.	K
	D	Bluetooth	KDT · A	.	D
LED COLOR TEMPERATURE									
	2	2700K	KDT · A	.	.	2
	4	4000K	KDT · A	.	.	4
LED BEAM ANGLE									
	1	19°	KDT · A	1	..
DOT POSITION									
	D	Side position	KDT · A	D PB



Para versión Bluetooth añadir Kit B.
 For Version Bluetooth please add the Kit B.