




# CLICK LINEAR

## LINEAR SYSTEMS



	W	mA	TEMP	LUM	CRI
LINEAR 10	14	250	3.000K	2.325	>85
			4.000K	2.499	
LINEAR 15	28	250	3.000K	4.650	>85
			4.000K	4.998	

## TEC.DRAWINGS

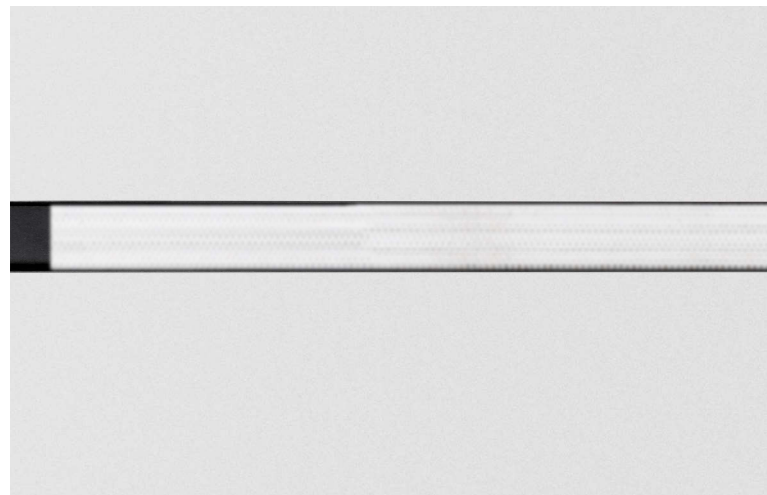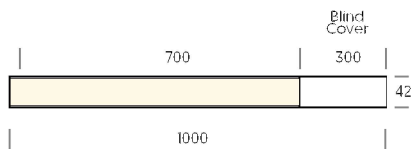


LED	230V	IP20	50.000h L90/B10	McAdam C3
1.000mm	≈ 14W	>2.300lm	<b>KLR1 A 10</b>	• • • • •
1.500mm	≈ 28W	>4.600lm	<b>KLR2 A 15</b>	• • • • •

## BASIC OPTIONS

<b>NO DIM</b>	<b>N</b>	No Dimmable								
<b>3K</b>	<b>3</b>	3000K								
<b>9</b>	<b>9</b>	120°								
<b>A</b>	<b>A</b>	Ice Difusser								
<b>WS</b>	<b>WS</b>	Satin White	KLR1	A	<b>10</b>	<b>N</b>	<b>3</b>	<b>9</b>	<b>A</b>	<b>WS</b>
			KLR2	A	<b>15</b>	<b>N</b>	<b>3</b>	<b>9</b>	<b>A</b>	<b>WS</b>
<b>BS</b>	<b>BS</b>	Satin Black	KLR1	A	<b>10</b>	<b>N</b>	<b>3</b>	<b>9</b>	<b>A</b>	<b>BS</b>
			KLR2	A	<b>15</b>	<b>N</b>	<b>3</b>	<b>9</b>	<b>A</b>	<b>BS</b>

## CUSTOMIZE OPTIONS

LED CONTROL										
<b>DALI</b>	<b>D</b>	Dimmable Dali	KLR•	A	•	<b>D</b>	•	9	A	••
<b>Bluetooth</b>	<b>D</b>	Bluetooth	KLR•	A	•	<b>D</b>	•	9	A	••
LED COLOR TEMPERATURE										
<b>4K</b>	<b>4</b>	4000K	KLR•	A	•	•	<b>4</b>	9	C	••



Para versión Bluetooth añadir Kit B.  
For Version Bluetooth please add the Kit B.