

SKUNA

- GENERAL WALL LIGHT
- BOLLARDS

A new compact bollard and wall luminaire family featuring robust aluminium housing with various type of light distribution. Utilized LED modules from renowned manufacturer with high precision optical lenses offering narrow beam, medium beam, wide beam, forward throw and side throw light distribution. Featuring screw-less design housing made from copper free LM6 die-cast aluminium and S6063 extruded aluminium with Nano-Ceramic film protection. Perfect for residential area as well as community-scale blocks.

NEW
Added




www.unilamp.co.th/en/p/skuna



Content by Applicator Content by Family

NEW SKUNA Bollard

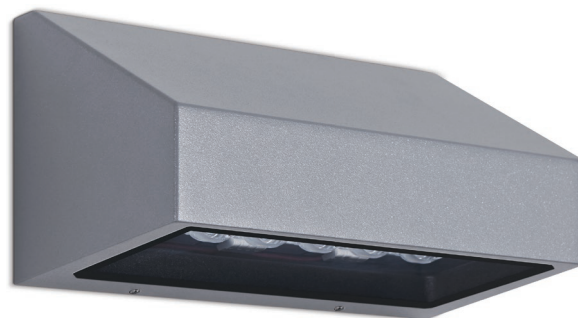

INPUT OPTION



Specification

- Designed, Manufactured and Tested according to IEC 60598.
- LM6 Die Cast Aluminium / Extruded Aluminium Housing.
- Stainless steel screws.
- Nano Ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual



Available Color

Black	(replace the last 2 digits of ordering code with 01)
Graphite	(replace the last 2 digits of ordering code with 02)
Dark Grey	(replace the last 2 digits of ordering code with 03)
Aluminium Silver	(replace the last 2 digits of ordering code with 04)
White	(replace the last 2 digits of ordering code with 06)
Wooden Brown	(replace the last 2 digits of ordering code with 07)

SKUNA

Mini SKUNA1
Downlight /
Downlight CVDA

Mini SKUNA2
Downlight



Mini SKUNA


GENERAL WALL LIGHT

Mini SKUNA1 Downlight / 5601
Mini SKUNA1 Downlight CVDA / 5601
Mini SKUNA2 Downlight / 5602

Luminaire Performance

350 - 3080 lm
8 - 28 W
44 - 113 lm/W

Beam Options




Color Temperature

2700K/ 3000K/ 4000K

Controller

Integrated driver with On-Off/ DALI control
24V CV Remote driver with On-Off/ DALI control

Accessories



SKUNA
Bollard Slim Base /
Bollard Slim Base CVDA

SKUNA
Short Bollard Slim Base /
Short Bollard Slim Base CVDA

SKUNA
Bollard Wide Base /
Bollard Wide Base CVDA




SKUNA
Short Bollard Wide Base /
Short Bollard Wide Base CVD

NEW!

NEW!

NEW!

NEW!



SKUNA


BOLLARDS

SKUNA - Bollard Slim Base / 7848
SKUNA - Bollard Slim Base CVDA / 7848
SKUNA - Short Bollard Slim Base / 7849
SKUNA - Short Bollard Slim Base CVDA / 7849

Luminaire Performance

360 - 890 lm
8 - 15 W
44 - 63 lm/W

Beam Options




Color Temperature

2700K/ 3000K/ 4000K

Controller

Integrated driver with On-Off/ DALI control
24V CV Remote driver with On-Off/ DALI control

Accessories



CV Driver

SKUNA

BOLLARDS

SKUNA - Bollard Wide Base / 7148
SKUNA - Bollard Wide Base CVDA / 7148
SKUNA - Short Bollard Wide Base / 7149
SKUNA - Short Bollard Wide Base CVDA / 7149

Luminaire Performance

360 - 890 lm
8 - 15 W
44 - 63 lm/W

Beam Options




Color Temperature

2700K/ 3000K/ 4000K

Controller

Integrated driver with On-Off/ DALI control
24V CV Remote driver with On-Off/ DALI control

Accessories



CV Driver



Anchor Bolt